


Mechanical Time Switches

<http://waterheatertimer.org/Intermatic-timers-and-manuals.html#GM>

GRÄSSLIN™
by INTERMATIC®





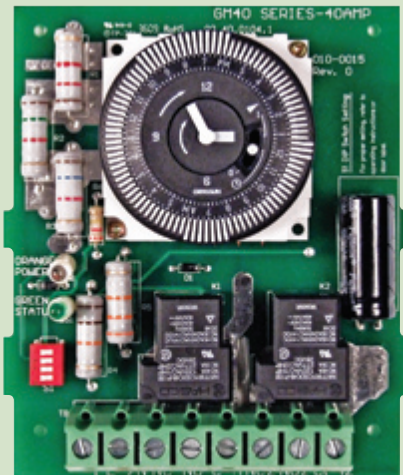

GM40



GM40-M



E10694 3 lbs -40°F
1.36 kg (-40°C)
to
131°F
(55°C)

Multi-Voltage 24-Hour and 7-Day

Features:

- Screw box lug terminals

Specifications:

N.O. Contacts:

- 40 Amp Resistive, 120-277 VAC
- 1 HP (16 FLA, 90 LRA), 120 VAC
- 2 HP (12 FLA, 52 LRA), 208-277 VAC
- 30 Amp Ballast, 120 VAC
- 20 Amp Ballast, 277 VAC
- 15 Amp Tungsten, 120 VAC
- 300 VA Pilot Duty, 120-240 VAC

N.C. Contacts:

- 30 Amp Resistive, 120-277 VAC
- 1 HP (12 FLA, 30 LRA), 120 VAC
- 2 HP (10 FLA, 30 LRA), 240 VAC
- 2 Amp Tungsten, 120 VAC
- 10 Amp Ballast, 277 VAC

Enclosures: NEMA 3R Indoor/Outdoor, see page 48, Model No. E300

Operating Temperature Range: -40°F to 131°F (-40°C to 55°C)

Operating Humidity: 0 to 95% non-condensing

Size: 8.795 in. H x 6.631 in. W x 2.935 in. D

Weight: 3 lbs.

Model Number	Description	Volts AC	Switch Configuration	Amp rating	Min. ON/OFF Time	Battery Back up
GM40	24-Hour mechanical time switch	120, 208/240, 277	SPDT/DPDT	40/30	15 minutes	No
GM40-M	24-Hour mechanism only	120, 208/240, 277	SPDT/DPDT	40/30	15 minutes	No
GM40Q	24-Hour mechanical time switch	120, 208/240, 277	SPDT/DPDT	40/30	15 minutes	Yes
GM40W*	7-Day mechanical time switch	120, 208/240, 277	SPDT/DPDT	40/30	2 Hours	No
GM40QW*	7-Day mechanical time switch	120, 208/240, 277	SPDT/DPDT	40/30	2 Hours	Yes

* Has 7-Day/Weekly/Skip-A-Day Functionality.