

TimeIt

7-Day Digital Timer

3-Wire Grounded Outlet and Plug

Rated: 125V/15A/1875W/60Hz

Customer Service: 1.800.730.3707

READ ALL INSTRUCTIONS - IMPORTANT!

Before using the timer plug it in for 10 - 15 minutes;
then press the reset button

TO SET THE CURRENT TIME:

- ① Press and hold the “**CLOCK**” button, then press the “**WEEK**” button to set the current day.
- ② Press and hold the “**CLOCK**” button, then press the “**HOUR**” button to set the current hour.
- ③ Press and hold the “**CLOCK**” button, then press the “**MIN**” button to set the current minute.

TO SET THE TIMER PROGRAM:

- ① Press the “**PROG**” button to enter the program setting. You will see “**1 ON**” to the left of the display.
- ② Press the “**WEEK**” button to set the program “**1 ON**” days of the week that you want the timer to function.
- ③ Press the “**HOUR**” button to set the program “**1 ON**” hour.
- ④ Press the “**MIN**” button to set the program “**1 ON**” minute.
- ⑤ Press the “**PROG**” button once and repeat step 2 to 4 to set program “**1 OFF**”.
- ⑥ After setting the program “**1 OFF**”, press the “**CLOCK**” button once to return to the current time.

You can set up to 8 different ON and OFF times for your timer. To do so, just repeat steps 2 through 5 for program “**2 ON**”, program “**2 OFF**”, program “**3 ON**” etc...


NOTE: Press the “**R**” button to clear all program settings.

MANUAL OVERRIDE:

The bottom of the LCD screen displays **ON**, **AUTO**, or **OFF**, depending on the current status of the timer.

Pressing the “**ON/AUTO/OFF**” button will allow you to manually change the status of the timer.

- ① If “**ON**” is displayed, the timer is continuously powered **ON**.
- ② If “**AUTO**” is displayed, the timer will turn **ON** and **OFF** based on the program settings.
- ③ If “**OFF**” is displayed, the timer is continuously powered **OFF**.

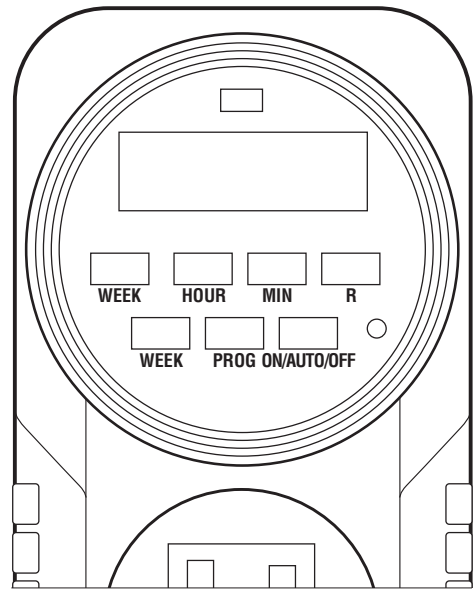

TO SET DAYLIGHT SAVINGS TIME:

To set daylight savings press the “**HOUR**” and “**MIN**” buttons at the same time to set the clock one hour ahead.

TO SET VACATION SECURITY:

Pressing the “**WEEK**” and “**HOUR**” buttons simultaneously will activate security mode. If “**O**” is on the right side of the display the timer will turn on randomly during different parts of the day. Simply press “**WEEK**” and “**HOUR**” simultaneously to disable security mode.

WARNING:

Liquid Crystal Display and integrated circuit are used in this digital timer. The screen of the timer is large display, multi-function, easy to use and heavy loading, etc.

The digital timer displays the present time accurately. It can control eight groups of on/off switches. It can give out a random timing output when required. There are also many combinations, such hourly, daily and weekly, group of the week, for the timer on and off selection.

With rated voltage 125V, rated frequency 60Hz, rated current 15(3)A, max, switching power 1875W, this timer, is with plug and socket itself. And it has a protection class which is class I and it has an ordinary protection degree. Feature of automatic action is type 1. Software class is class A.

LIMITATIONS OF TIMING DEVICES:

Timing devices require power to function properly. If AC power to the timer is cut off, a light or other device plugged into the timer will not work.

NOTES:

- ① The unit you are plugging into the timer has to be on.
- ② Be sure that AM/PM is displayed correctly when setting the clock or the timer programs.

SAVE THESE INSTRUCTIONS!