


DTAV40 Series
Auto-Voltage Defrost Timer

No Tools Required


Snaps into existing enclosures

Defrost / HVACR

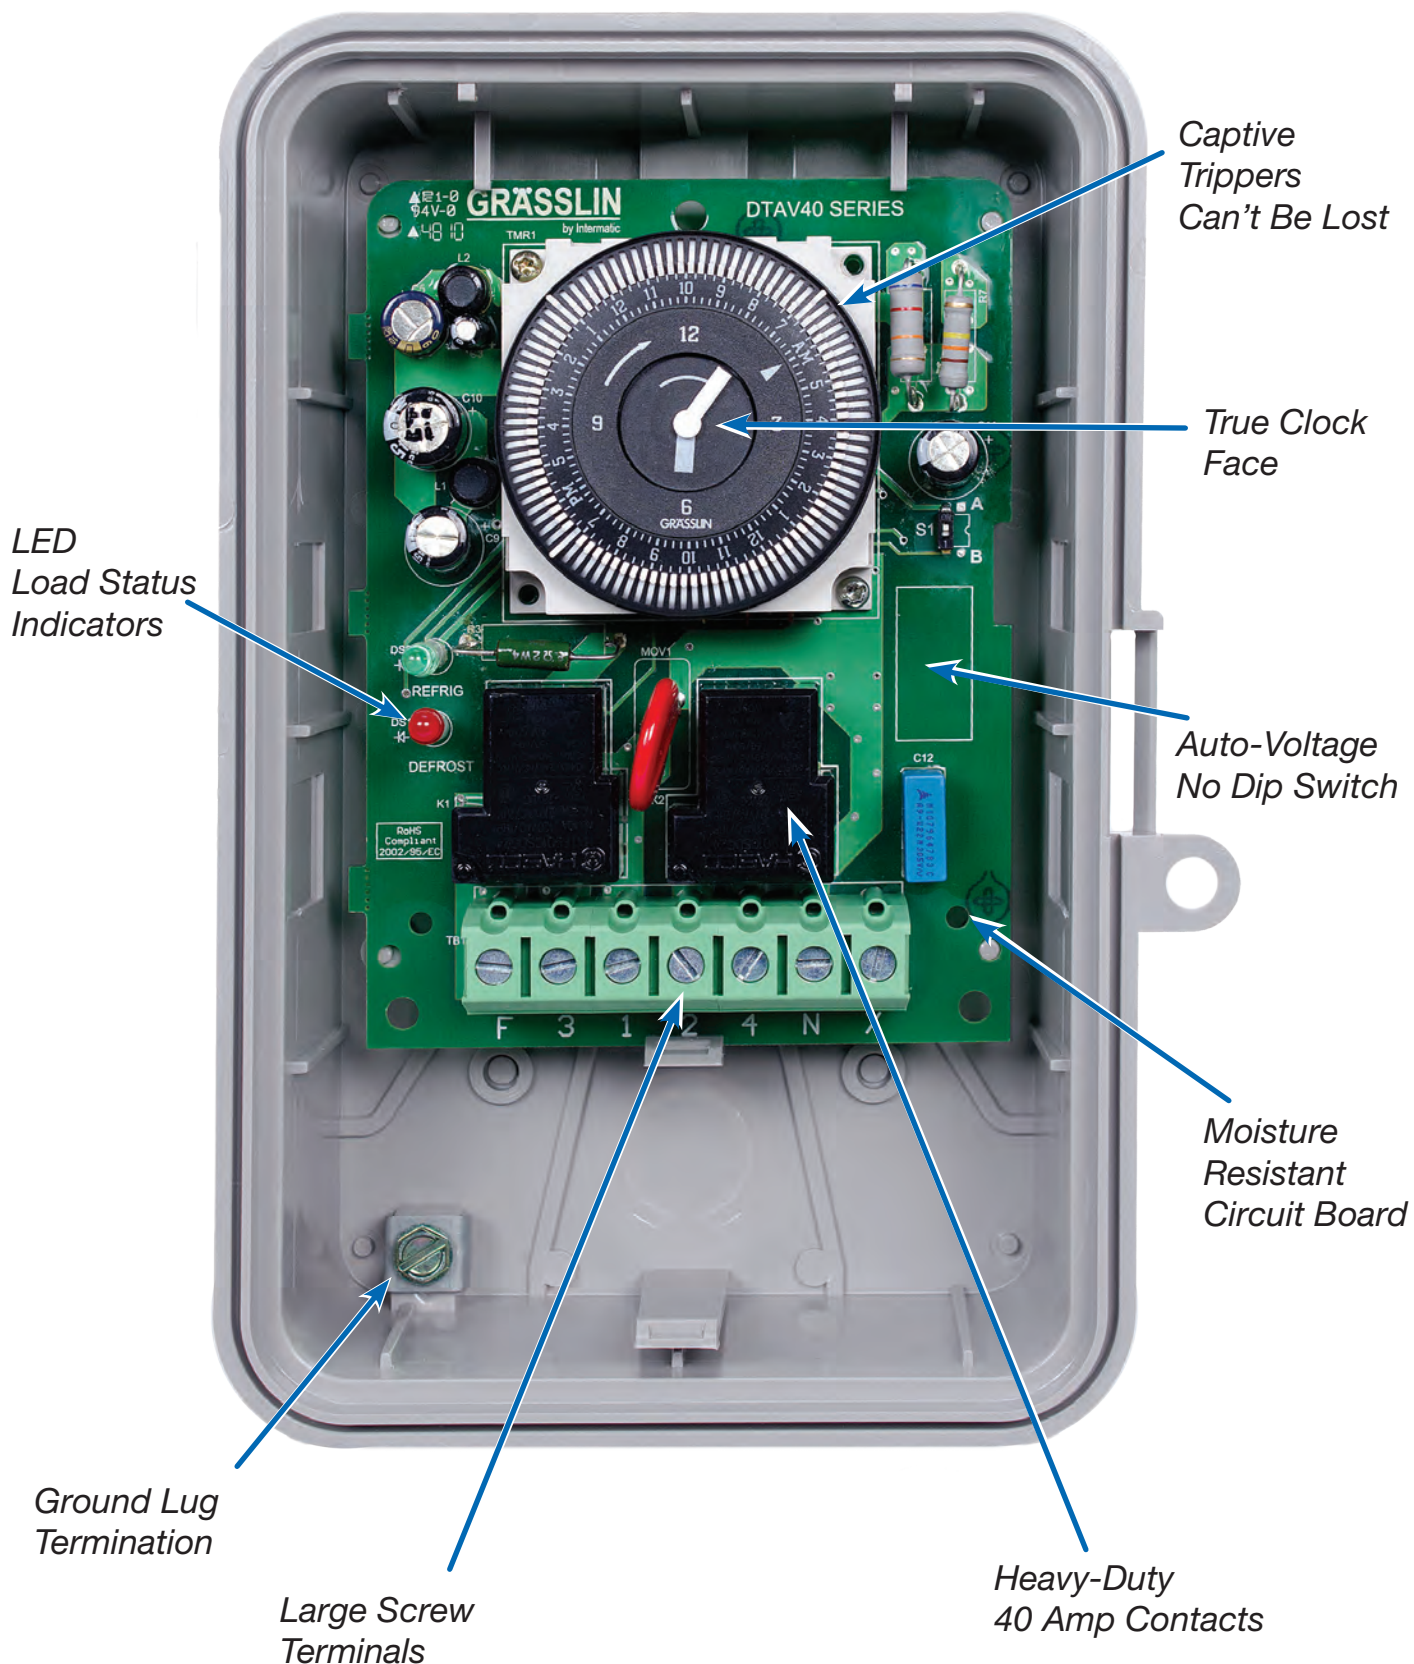



B.

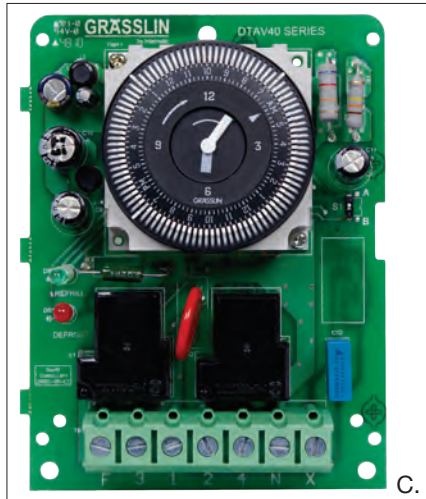

C.



A.

DTAV40 Series Auto-Voltage Defrost Timer



- Time Initiated. Temperature, Pressure or Time Terminated
- Replaces over 40 competitive models
- Automatically adjusts voltages between 120 and 240 VAC
- No tools required, mounts in existing enclosures
- Heavy-duty 40 Amp contact ratings
- Programmable defrost times in 15-minute intervals
- Moisture resistant conformal coated board
- Independently programmed defrost cycles
- LED indicators for defrost and refrigeration cycles
- True clock face for quick, easy and accurate setting

Ratings:

Auto Voltage: 120-240 VAC, 60 Hz
Quartz: 120-240 VAC 50/60 Hz
Electrical Ratings: 40 A Resistive, 120-240 VAC 1 HP, 120 VAC, 2 HP, 240 VAC
Operating Humidity: 0-95% RH, non-condensing
Min. ON/OFF: 15 minutes
Max. ON/OFF: 23 hours, 45 minutes
Electrical Life: 50,000 operations at full load
Wire Size: #8 AWG
Temp Rating: -40°F to 104°F (-40°C to 40°C)
Quartz Temp Rating: -4°F to 104°F (-20°C to 40°C)
Warranty: 1 year

Model #	Input Voltage	Enclosure	Timer Type	Battery Backup
A. DTAV40	120, 208/240 VAC	Type 3R Plastic	Synchronous	No
B. DTAV40IM	120, 208/240 VAC	Type 1 Metal	Synchronous	No
C. DTAV40M	120, 208/240 VAC	Mechanism Only	Synchronous	No
DTAV40Q	120, 208/240 VAC	Type 3R Plastic	Quartz	Yes (7-Day Carryover)
DTAV40Q-M	120, 208/240 VAC	Mechanism Only	Quartz	Yes (7-Day Carryover)

Accessory

Model #	Description
DT-B	Bracket accessory for mounting

For enclosure dimensions, see page 151.