

## Cn101 WEEKLY PROGRAMMABLE TIMER


### BASIC FEATURES:

- ◆ Panel mounted
- ◆ Advanced pre-setting one week before
- ◆ Digital electronic timer switch with daily programs
- ◆ Repeat programs with 17 on/off setting and manual over-ride
- ◆ Lithium battery power reserve when electric supply cut off
- ◆ Auto timer error correction  $\pm 30\text{sec}$ , weekly

### TECHNICAL DATA:

- ◆ Voltage rating: 220VAC
- ◆ Hysteresis: 2 sec/day (25°C)
- ◆ ON/OFF operation: 17 ON/OFF
- ◆ Power consumption: 7.5VA (MAX)
- ◆ Service life: Mechanical  $10^7$ , Electrical  $10^7$
- ◆ Display: LCD
- ◆ Minimum interval: 1 minute
- ◆ Weight: approx 66g
- ◆ Switching contact: 1 changeover switch
- ◆ Power reserve: 3 years (Lithium battery)
- ◆ Ambient temperature: -10~+40 °C
- ◆ Ambient humidity: 35~85%RH

### DIMENSIONS:

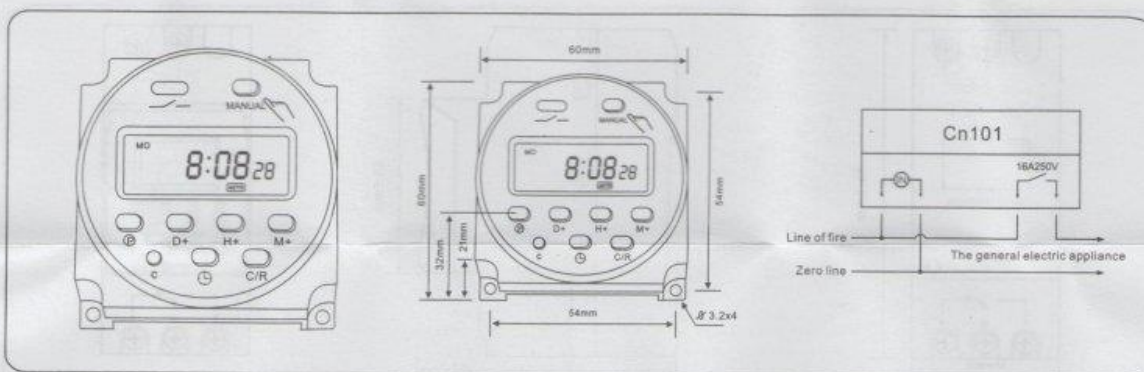

### OPERATION INSTRUCTION:

1. To start switch: press C key.
2. At first time, If you want to the current time, please press  $\ominus$  key, then press D+, H+, M+ to adjust the number to the current time.
3. Programming as follows:

Step	Key	Programming
1	Press P	Setting 1 ON time (display 1on)
2	Press H+/M+	Setting hours and minutes
3	Press D+	Select same everyday, different everyday, MO-FR, MO-SA, SA-SU, MO WE FR, TU TH SA, MO-WE, TH-SA. (If same everyday, no Need to press this key)
4	Press P	Setting 1 OFF time (display 1off)
5	Press H+/M+	Setting hours and minutes turn off time
6	Press D+	If you want the same setting every day, you need not press this key
7	Repeat step2~6	Set 2-17 on/off time
8	Press $\ominus$	End

If the setting is wrong, please C/R to cancel or reset the programs

If you do not require 17 settings, press " $\ominus$ " to the end.