

Trealux 610 Staircase Switch


SPECIFICATION SHEET




Note:

3-line connection for new systems not permissible!

3-line connection

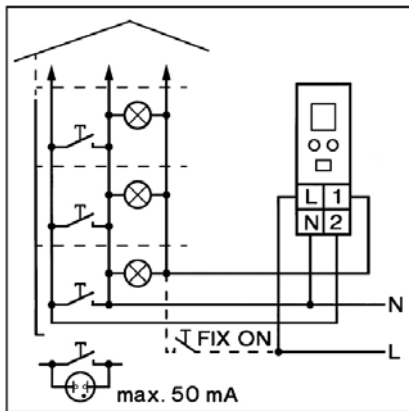

4-line connection

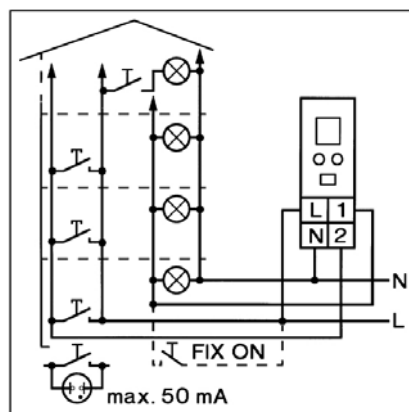

Electronic

Automatic recognition of 3-line or 4-line connection

Safety staircase lighting time switch in acc. to DIN 18015 with impulse pre-warning

Adjustment range: 0.5 - 99,5 min.

If any key is pressed for more than 2 seconds, the light remains on for 1 hour

Technical data

Dimensions (mm)	45 x 17,5 x 62
Distributor cut-out (mm)	46 x 18
Connection	230 V/50-60 Hz
Switching capacity AC	16 A / 230 V AC
- Ohmic load (VDE, IEC) $\cos. \phi$ 1	10 A / 230 V AC
- Inductive load $\cos \phi$ 0,6	2300 W
- Incandescent lamp load	20 x 2 x 58 W
- Fluorescent lamp in DUO circuit	20 x 58 W
- Fluorescent lamp, parallel compensated	40 x 58 W
- Fluorescent lamp, series-compensated	5 x 20 W
- EVG	1500 W
- KVG	
Switch contacts	1 Schließer
Ambient temperature	-10°C ... +55°C
Protection class	II
Protection type	IP 20
Adjustment range	0,5 min ... 99,5 min
Dim time	-
Glow lamp load	max. 50 x 1 mA
On-time	100% ED
Manual switch	yes
Re-triggerable	once
Connection type	captive ± screw terminals
Switching type	automatic recognition of 3-line or 4-line connection
Diagnosis functions	yes
Time extension	yes