



**H5CLR MULTI-FUNCTION DIGITAL TIMER**



**CHARACTERISTICS :**

- Eleven field-selectable output modes accommodate a wide variety of applications
- 7-segment-display for clear display and effective monitoring
- All parameters set by scrollthrough menus accessed from the front panel
- Field-selectable time ranges from 0.001 second to 9999 hours
- Precision control possible to 0.001 second
- Four levels of key protection provided
- Count Up or Count Down mode user selectable
- Memory function available
- UL, C-UL recognized and CE certified

**SPECIFICATION :**

|                                   |  |
|-----------------------------------|--|
| Operating voltage                 | AC/DC(V): 12~48 or 100~240                               |
| Allowable operating voltage range | 85~110% of rated operating voltage                       |
| Rated frequency                   | 50 / 60 Hz   |
| Contact rating                    | 250VAC 5A (resistive load)                               |
| Reset time                        | MAX 0.1s   |
| Reset time                        | Approx. 2.5VA  |
| Life                              | Mechanical: 5,000,000 times<br>Electrical: 100,000 times |
| Ambient temperature               | -10 ~ +50°C  |
| Ambient humidity                  | MAX 85%RH  |
| Weight                            | Approx. 120g   |

**TYPE SELECTION :**


| Type             | H5CLR-8  | H5CLR-8G              | H5CLR-11              | H5CLR-11M             |
|------------------|--|-----------------------|-----------------------|-----------------------|
| Time range       | 9.999s / 99.99s / 999.9s / 9999s / 999.9m / 9999m / 999.9h / 9999h / 99m59s / 99h59m |                       |                       |                       |
| Output contact   | 2C or 1A1C   | G Type                | 2C(1A1C) + G Type     | M Type                |
| Memory           |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |
| External Reset   |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |
| External Start   |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |
| External Gate    |  |                       |                       | <input type="radio"/> |
| Key protect(K/P) |  |                       |                       | <input type="radio"/> |

Product is subject to change without notice.


A33

## CONNECTION :


H5CLR-8




H5CLR-8G



H5CLR-11




H5CLR-11M



## TIMING CHART :

Output mode **A** : Signal ON delay 1 (Timer resets when power comes ON.)

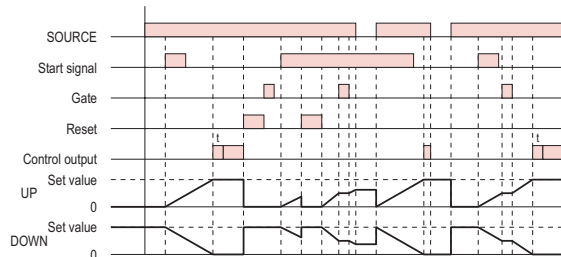


Timing starts when the start signal goes ON.

While the start signal is ON, the timer starts when the power comes ON or when the reset input goes OFF.

The control output is controlled using a sustained or one-shot time period.

Output mode **A-1** : Signal ON delay 2 (Timer resets when power comes ON.)

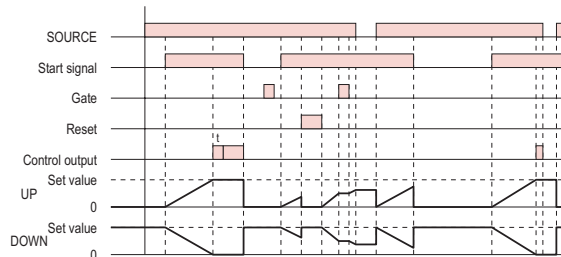


Timing starts when the start signal goes ON, and is reset when the start signal goes OFF.

While the start signal is ON, the timer starts when the power comes ON or when the reset input goes OFF.

The control output is controlled using a sustained or one-shot time period.

Output mode **A-2** : Power ON delay 1 (Timer resets when power comes ON.)

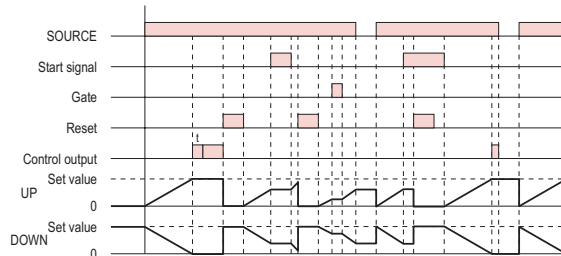


Timing starts when the reset input goes OFF.

The start signal disables the timing function (ie., same function as the gate input).

The control output is controlled using a sustained or one-shot time period.

Output mode **A-3** : Power ON delay 2 (Timer dose not reset when power comes ON.)

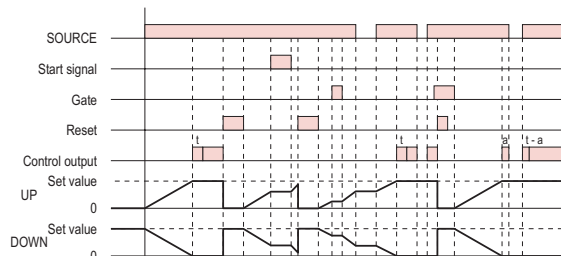


Timing starts when the reset input goes OFF.

The start signal disables the timing function (ie., same function as the gate input).

The control output is controlled using a sustained or one-shot time period.

### Output mode **B** : Repeat cycle 1 (Timer resets when power comes ON.)

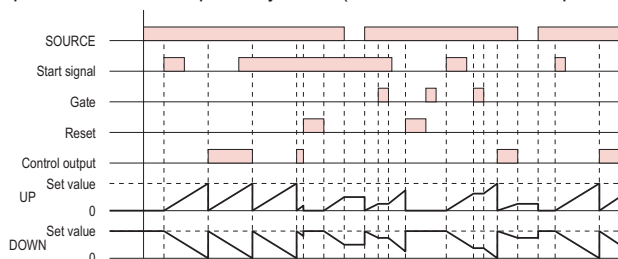


Timing starts when the start signal goes ON.

The status of the control output is reversed when time is up (OFF at start).

While the start signal is ON, the timer starts when the power comes ON or when the reset input goes OFF.

### Output mode **B-1** : Repeat cycle 2 (Timer dose not reset when power comes ON.)

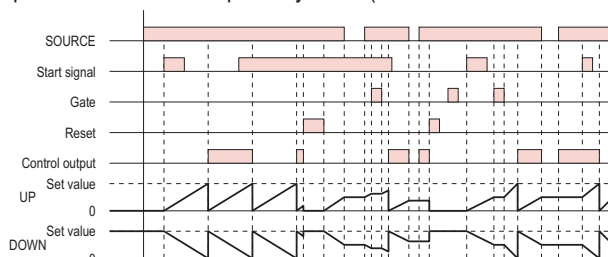


Timing starts when the start signal goes ON.

The status of the control output is reversed when time is up (OFF at start).

While the start signal is ON, the timer starts when the power comes ON or when the reset input goes OFF.

### Output mode **B-2** : Repeat cycle ON start (Timer resets when power comes ON.)

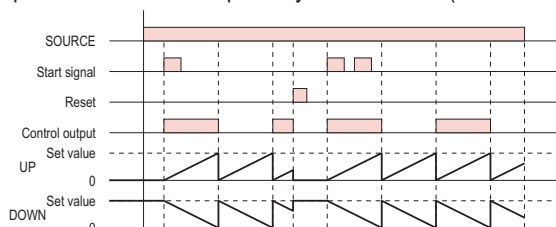


Timing starts when the start signal goes ON.

The status of the control output is reversed when time is up (OFF at start).

While the start signal is ON, the timer starts when the power comes ON or when the reset input goes OFF.


### Output mode **C** : Signal ON/OFF delay (Timer resets when power comes ON.)

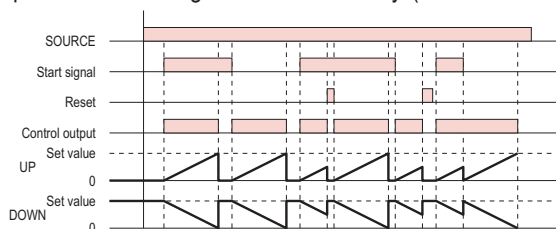

Timing starts when the start signal goes ON or OFF.

The status of the control output is ON when the start signal goes ON or OFF.


### Output mode **D** : Signal OFF delay (Timer resets when power comes ON.)

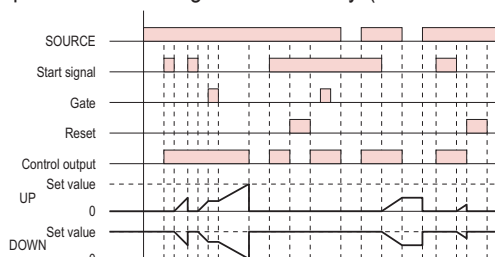

The control output is ON when the start signal is ON (except when the power is OFF or the reset is ON).

The timer is reset when the time is up.

### Output mode E : Interval (Timer resets when power comes ON.)

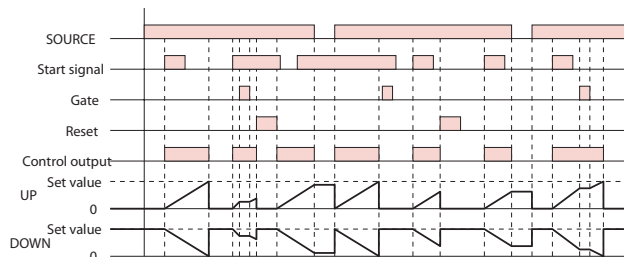


Timing starts when the start signal comes ON.

The control output is reset when time is up.

While the start signal is ON, the timer starts when power comes ON or when the reset input goes OFF.

### Output mode F : Cumulative (Timer does not reset when power comes ON.)

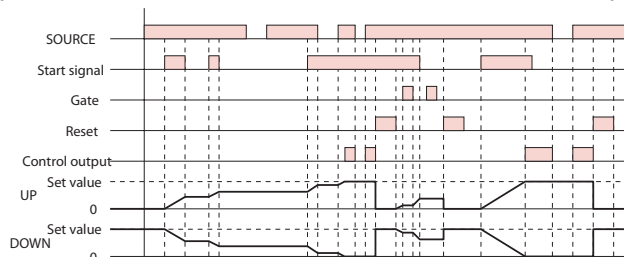


Start signal enables timing (timing is stopped when the start signal is OFF or when the power is OFF)

A sustained control output is used.

### DIMENSIONS : (mm)

N type(Surface Mounting): Using P2CF-08 , PF085A Socket or PF113A Socket(for H5CLR-11/11M use only)

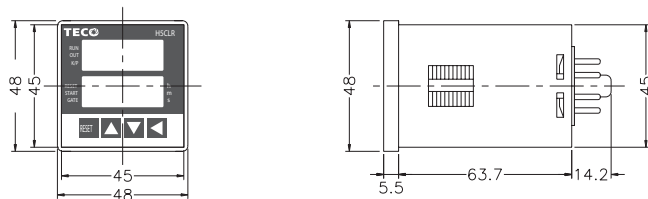

Y type(Flush Mounting): Using Y50 Frame & US-08 Socket , P3G-08 Socket  
Note: 11 pin relay socket not offered for H5CLR-11/11M

