

Model T104P201 with Plastic enclosure

Model T104R201 with Metal enclosure

24 Hour Dial Time switch with Fireman switch

240Volt timer with heater protection that turns off gas-fired pool heater 15-20 minutes before turning off filter pump. This eliminates knocking due to overheated water, reduces scale and lime, and extends service life of heater

**DOUBLE POLE SINGLE THROW (DPST)**  
**40 AMP. RESISTIVE EACH POLE 120-480 VOLT AC;**  
**40 AMP.INDUCTIVE OR TUNGSTEN OR 1000 VA**  
**PILOT DUTY EACH POLE 120V-277V AC;**  
**2 HP (24 FLA)-120V AC; 5 HP (28 FLA)-240V AC.**

Heater protection circuit: 10A 240V max.


**WG1573 clock motor/ 156T1978A Tripper** / 9-3/8" H x 5-1/2" W x 3-5/8" D/ 1/2" and 3/4" KO on back and side



**T104P201**

## CLOCK MOTOR: 208-277 VOLTS - 60 HZ.

CLOCK MOTOR VOLTAGE AND CYCLE MUST BE AS SPECIFIED. TO ORDER REPLACEMENT, INDICATE PART NO. (WG--) ON MOTOR COVER.

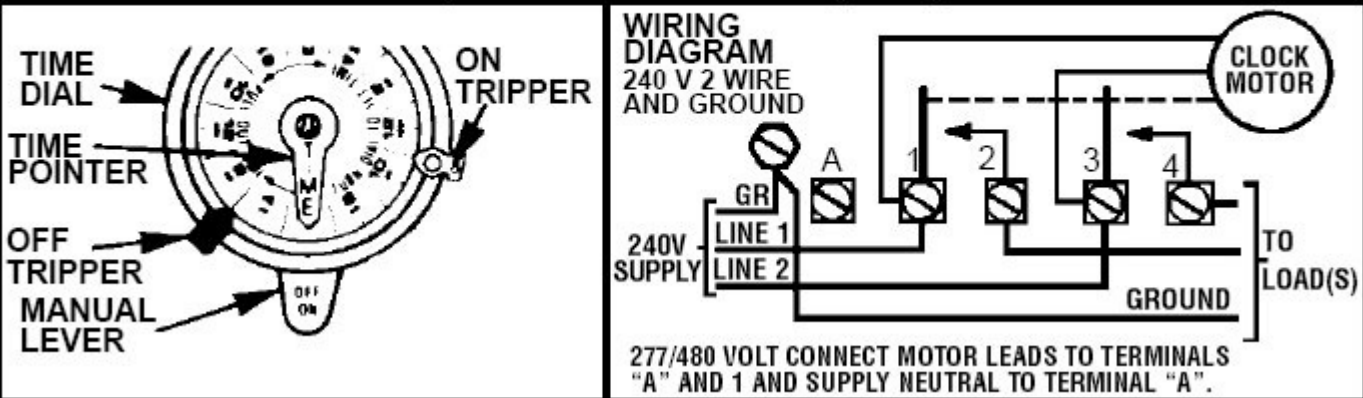

## PROGRAMMING INSTRUCTIONS

- 1. TO SET "ON" AND "OFF" TIMES:** Hold trippers against edge of **CLOCK-DIAL**, pointing to time (AM or PM) when **ON** and **OFF** operations are desired, tighten tripper screws firmly. For additional tripper pairs on **CLOCK-DIAL** order 156T1978A.
- 2. TO SET TIME-OF-DAY:** Pull **CLOCK-DIAL** outward. Turn in either direction and align the exact time-of-day on the **CLOCK-DIAL** (the time now, when switch is being put into operation) to the pointer. **DO NOT MOVE POINTER.**

## OPERATING INSTRUCTIONS

- TO OPERATE SWITCH MANUALLY:** Move **MANUAL LEVER** below **CLOCK-DIAL** left or right as indicated by arrows. This will not effect next operation.
- IN CASE OF POWER FAILURE,** reset **CLOCK-DIAL** to proper time-of-day. See programming instructions.

