



The new degree of comfort.™

Residential Electric
Marathon Point-of-Use
 Water Heaters

Marathon® Point-of-Use non-metallic electric water heaters are durable, lightweight, easy to install and offer a longer warranty

Non-metallic Tank Features

- Seamless, blow-molded, polybutene tank – impervious to rust and corrosion
- Multiple layers of filament wound fiberglass give the tank unmatched strength
- Polyurethane insulation helps reduce energy consumption and standby heat loss
- Recessed drain valve is out of the way of brooms and scrubbers
- High temperature polysulfone dip tube
- Tough molded polyethylene outer shell resists dents, scratches, and salt air
- All plastic tank eliminates the need for an anode rod

Easy Installation & Service

- Marathon point-of-use's lightweight tank is easy to maneuver and position
- Bowl shaped tank bottom allows complete sediment draining
- Water tight grommets keep out overhead moisture and condensation
- 3/4-Inch inlet and outlet connections
- Built for applications where larger water heaters won't fit, such as apartments, recreational property, and restrooms in offices and commercial buildings

Element Wattage and Voltage

- 15 and 20-Gallon with a 2,000 watt element and 120-voltage; 20-gallon with a 3,000 watt element and 240-voltage

Plus...

- Thermally fused element to protect against dry-firing; low watt, density for long life
- Full-flow, brass drain valve
- Temperature and pressure relief valve
- Low Lead compliant
- Standard replacement parts

Warranty


- Residential Application: Lifetime limited warranty on tank and 6-years on parts*
- Commercial Application: 5-year limited tank warranty and 1-year on parts†

* Warranty is provided to original customer in a residential application after online product registration is complete. Registration must be completed within 90 days of installation.

† See Warranty Certificate for complete information



Marathon Point-of-Use
 15 and 19.9-U.S. Gallon Capacities
 Electric

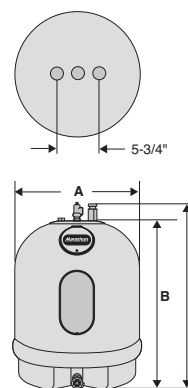

| MODEL NUMBER | STORAGE CAPACITY | | FEATURES | | ROUGHING IN DIMENSIONS (SHOWN IN INCHES) | | | | ENERGY INFO. |
|--------------|------------------|-----------|-----------------|---------|--|---------------|-------------------------|------------------------|-------------------|
| | U.S. GAL. | IMP. GAL. | ELEMENT WATTAGE | VOLTAGE | TANK DIAMETER A | TANK HEIGHT B | HEIGHT TO WATER CONN. C | APPROX. SHIP WT. (LBS) | STANDBY WATT LOSS |
| CMR15120 | 15 | 12 | 2000 | 120 | 21-3/4 | 31-3/4 | 35-3/4 | 58 | N/A |
| CMR20120 | 19.9 | 17 | 2000 | 120 | 23-1/2 | 30-1/2 | 34-1/2 | 61 | N/A |
| CMR20230 | 19.9 | 17 | 3000 | 240 | 23-1/2 | 30-1/2 | 34-1/2 | 61 | N/A |

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
 Brampton, Ontario L6Y 0P5 • www.rheem.ca



INTEGRATED HOME COMFORT