

Figure 2 PE103/P1403ME 120 and 240 VAC wiring for 2-speed and single speed pumps.

Verifying Wire Installation

Verify that the timer wires are connected properly. Press the **LO** button on the controller to verify that **LO** appears on the screen. If your pump uses high speed, press the **HI** button to verify **HI** appears on the screen. If you are using the auxiliary circuit, press the **AUX** button. The screen displays **ON** next to **LOAD 4**. If any of the circuits do not activate on command, review Figure 2 above to adjust the wiring as needed.

NOTE: After a circuit button is pressed, the circuit will shutoff after 30 seconds.

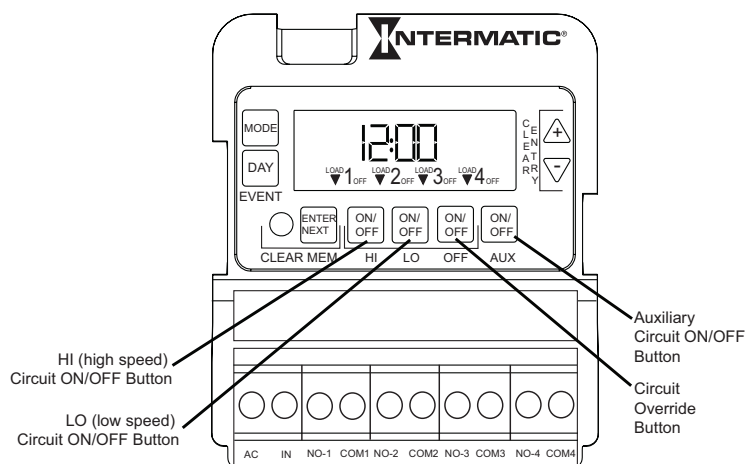


Figure 3 Controller with circuit buttons.