


Time Lag Switch with illuminated push button

This time lag switch will switch on any connected load when the illuminated push button is pressed. It then switches off automatically after the time lag has elapsed.


This switch requires a neutral wire.

The time lag may be adjusted by inserting a narrow screwdriver (flat) through the hole at the lower edge of the switch. The range is from 2 minute to 20 minutes (factory preset to approx 10 minutes).




1. Read these notes before commencing work
2. In case of doubt, consult a qualified electrical contractor
3. Make sure power is switched off from the circuits you are working on by removing appropriate fuses, or switching off appropriate isolating switches
4. The maximum load must not exceed 6 amps, with a 230VAC supply.
5. The circuit diagram is shown below. There is a separate terminal block for optional remote push buttons which may be wired in parallel. The push button(s) must be mains rated, push to make.

Mains must not be connected to the slave push button terminal block.

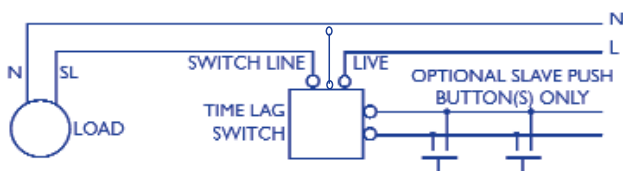

Alternatively, several time lag switches can be wired in parallel

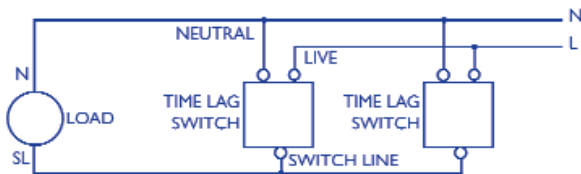

6. To operate, press the illuminated time lag switch or a connected push button to switch the load on. The load is switched off automatically after the time lag has elapsed.