



INTERMATIC®
IN-WALL TIMERS



**TO-THE-MINUTE CONTROL
FOR EVERY APPLICATION**

INTERMATIC®

IN-WALL TIMERS



EI40C



Programmable SS8*




SS7C/EI20C*



Interval

ALL ELECTRONIC MODELS INCLUDE

- Silent operation
- Wires in series with load
- Heavy-duty load switching
- Replaces any standard switch
- 3 year memory protection
- Use w/ existing decorator plate

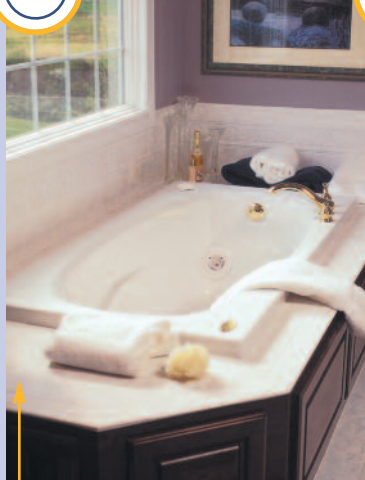

Astronomic



7-day



SPECIFICATIONS

- Automatically switches off loads
- Set for 1 sec. to 24 hr. intervals
- 3 year memory protection
- With field-selectable audible and/or flash warning 3 min. prior to shut OFF
- 20 amp resistive, 16 amp ballast, 15 amp tungsten and 1 & 2 HP @ 120 & 240V
- Use with existing decorator plate



White



Almond

SPECIFICATIONS

- Up to 7 ON/7 OFF settings per day
- Astronomic function automatically changes the ON time each day to follow sunset, so you never need to adjust the timer
- Automatic daylight savings time adjustment
- 3 year memory protection
- 15 amp resistive & tungsten, 8 amp ballast and 1 & 2 HP @ 120 & 240V motor switching
- Use with existing decorator plate



White

SPECIFICATIONS

- Up to 6 ON/6 OFF settings per day
- 3 year memory protection
- SS7C has 15 amp resistive & tungsten, 8 amp ballast and 1 & 2 HP @ 120 & 240V motor switching
- Use with existing decorator plate
- Automatic daylight savings time adjustment
- EI20C has 20 amp resistive, 16 amp ballast, 15 amp tungsten and 1 & 2 HP @ 120 & 240V ratings



White





EJ351C



EI100/1200

EI1000



FD

FF



EI15MH

24 Hour Non-Digital

24 Hour Mechanical

Springwound Interval

15 Minute Interval



SPECIFICATIONS

- Up to 24 ON/24 OFF settings per day
- Self-learning feature repeats usage
- 15 min. solid state memory
- 40–500 watts incandescent or “P” type ballast switching
- Use with existing toggle or decorator plate
- 120 VAC, 60 Hz.



White

SPECIFICATIONS

- Up to 36 ON/ 36 OFF events
- 20 minute minimum ON/OFF times
- 1440 Watts minimum
- Replaces existing switch plate
- E1200 series includes 2 gang plate for additional toggle or decorator switch



White

SPECIFICATIONS

- Time Ranges of 5, 15, 30, 60 min. and 2, 4, 6, 12 hours
- SPST, SPDT or DPST contacts
- 20 amp resistive, 20 amp inductive 7 amp tungsten and 1 & 2 HP @ 120 & 240 V



White



Ivory



Almond



Metal

SPECIFICATIONS

- Automatically switches off loads after 15 minutes
- 40–50 Watt incandescent or “P” type ballast
- With lockout plate to eliminate permanent ON



Ivory

For more information go to

www.intermatic.com

- Copy & paste specifier text
- Downloadable programming help and wiring diagrams

Model #	Bathroom Fans	Whole Home Fans	Coach Lights	Security Lights	A/C Air Cond.	Area Lighting	Office Lights
Programmable Controls							
EJ351C			•	•		•	•
SS8	•	•	•	•	•	•	•
SS7C	•	•	•	•	•	•	•
EI20C	•	•	•	•	•	•	•
E1010	•	•	•	•	•	•	•
E1020	•	•	•	•	•	•	•
E1120	•	•	•	•	•	•	•
E1220	•	•	•	•	•	•	•
E1221	•	•	•	•	•	•	•
Interval Timers							
EI40C	•	•	•		•		•
EI40AC	•	•	•		•		•
FD Series	•	•	•		•		•
FF Series	•	•	•		•		•
E115MH			•				•

Model #	Color	Amperage or Wattage	Motor Rating	Single Pole	3-way	Repeat Cycle
Programmable Controls						
EJ351C	White	40–500 W	–	•		24 Hr.
SS8	White	15 Amps	1 HP@120V 2 HP@240V	•	•	7 Day
SS7C	White	15 Amps	1 HP@120V 2 HP@240V	•	•	7 Day
EI20C	White	20 Amps	1 HP@120V 2 HP@240V	•	•	7 Day
E1010	Beige	1800 W	1 HP@120V	•		24 Hr.
E1020	Beige	1800 W	1 HP@120V	•		24 Hr.
E1120	White	1875 W	1 HP@120V	•		24 Hr.
E1220	White	1875 W	1 HP@120V	•		24 Hr.
E1221	White	1875 W	1 HP@120V	•		24 Hr.
Interval Timers						Interval
EI40C	White	20 Amps	1 HP@120V 2 HP@240V	•	•	1 sec.–24 Hrs.
EI40AC	Almond	20 Amps	1 HP@120V 2 HP@240V	•	•	1 sec.–24 Hrs.
FD Series	White/Almond/Ivory	20 Amps	1 HP@120V 2 HP@240V	•	•	5 min.–12 Hrs.
FF Series	Brushed Aluminum	20 Amps	1 HP@120V 2 HP@240V	•	•	5 min.–12 Hrs.
E115MH	Ivory	40–500 W	–	•		15 min.