


SMC 3D

Input – Sustained voltage 120VAC
Momentary Contacts (unpowered)
30 Amps inrush –
120VAC, 240VAC
277VAC, 30VDC

TORK DIGITAL CONTROL
TERMINAL BLOCK
MAINTAINED CONTACT INPUT

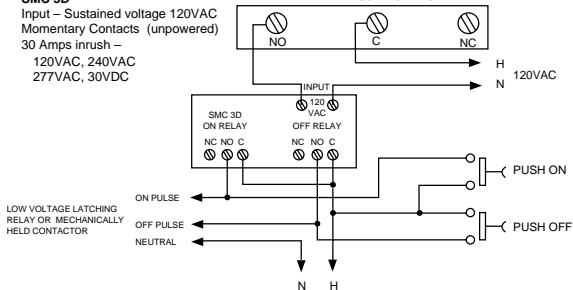

LOW VOLTAGE LATCHING
RELAY OR MECHANICALLY
HELD CONTACTOR

TORK DIGITAL CONTROL
TERMINAL BLOCK
MAINTAINED CONTACT INPUT

