


SMC 3D


Input – Sustained voltage 120VAC
Momentary Contacts (unpowered)
30 Amps inrush –
120VAC, 240VAC
277VAC, 30VDC

TORK DIGITAL CONTROL
TERMINAL BLOCK
MAINTAINED CONTACT INPUT

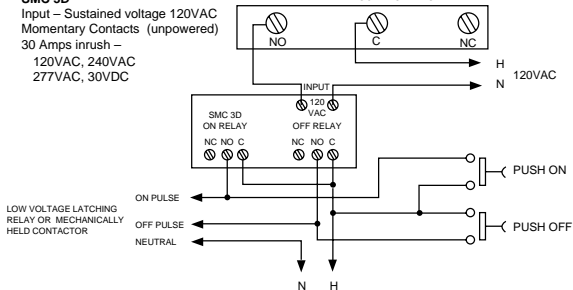

LOW VOLTAGE LATCHING
RELAY OR MECHANICALLY
HELD CONTACTOR

RELAY CONTACTOR

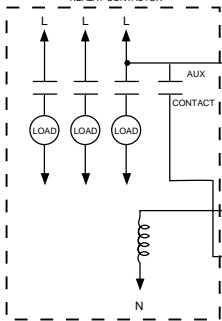

ELECTRICALLY HELD CONTACTOR
MOTOR STARTER

TORK DIGITAL CONTROL
TERMINAL BLOCK
MAINTAINED CONTACT INPUT

