


## Advanced Electronic Time Controls 1, 2, and 4 Channels

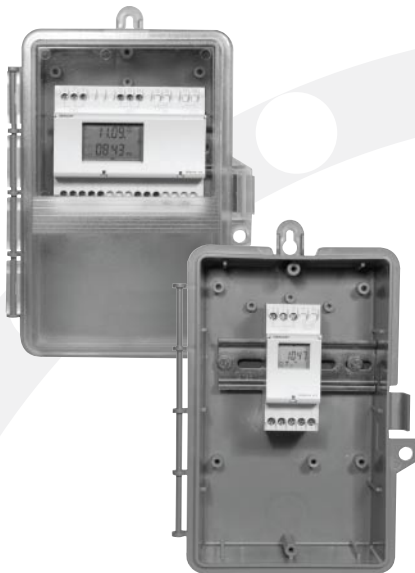

Talento 400/800 Series Ordering Data				
Grasslin/Intermatic Model	Voltage	Output	Channels	Programs
<b>Mechanism Only</b>				
TALENT0471-120	120VAC, 50/60Hz	16A SPDT	1	30
TALENT0891-24	24VAC/DC, 50/60Hz	16A SPDT	1	400
TALENT0891-120	120VAC, 50/60Hz	16A SPDT	1	400
TALENT0472-120	120VAC, 50/60Hz	16A SPDT	2	30
TALENT0892-24	24VAC/DC, 50/60Hz	16A SPDT	2	400
TALENT0892-120	120VAC, 50/60Hz	16A SPDT	2	400
TALENT0894-24	24VAC/DC, 50/60Hz	16A SPDT	4	400
TALENT0894-120	120VAC, 50/60Hz	16A SPDT	4	400
<b>NEMA 1 Indoor Enclosure</b>				
GMX471-I-120	120VAC, 50/60Hz	16A SPDT	1	30
GMX891-I-120	120VAC, 50/60Hz	16A SPDT	1	400
GMX472-I-120	120VAC, 50/60Hz	16A SPDT	2	30
GMX892-I-24	24VAC/DC, 50/60Hz	16A SPDT	2	400
GMX892-I-120	120VAC, 50/60Hz	16A SPDT	2	400
GMX894-I-24	24VAC/DC, 50/60Hz	16A SPDT	4	400
GMX894-I-120	120VAC, 50/60Hz	16A SPDT	4	400

### SRS 3800

#### 7 Day, 8-Channel End Time Switch

**APPLICATION:** Time of day ON/OFF control of 8 circuits of HVAC systems, zone heating, industrial processes, alarm systems, lighting, fans, pumps or other loads in commercial, industrial, institutional, and agricultural facilities. A simple and effective energy management system for small and mid-sized office buildings, schools, banks, malls, and government buildings.

#### Specifications:

- Input Voltage** – 120VAC 50/60 Hz
- Output Rating** – 10A Resistive @ 120~240VAC per channel
- Output Configuration:** 6 SPDT, 2 SPST (NO)
- Power Consumption:** 12VA
- Shortest Switching Time:** 1 minute
- Ambient Temperature:** 14°F to 122°F (-10°C to 50°C)
- Ambient Humidity:** 0 to 95% RH, non-condensing
- Manual 3-Way Override:** Auto-On-Off
- "ON" or "OFF" status indicator for each channel
- Wiring Connections:** Screw terminals, 12-24AWG
- Size:** 8.38" (213mm) x 7.08" (180mm) x 4.5" (114mm)

SRS 3800 Ordering Data				
Grasslin/Intermatic Model	Voltage	Output	Channels	Programs
<b>Plastic Clear Enclosure</b>				
SRS3800-120	120VAC, 60Hz	10A, 6-SPDT & 2-SPST	8	224



#### Features:

- 8 channels programmable independently or simultaneously
- 7 day programming
- 2 ON and 2 OFF settings per day
- ON-OFF-AUTO Override for each channel
- Holiday "OFF" provision
- Indoor/Outdoor enclosure w/clear door
- Battery backup for 1 month
- 10 Amp, SPDT switching

