

DIN SERIES

1 OR 2 CHANNEL 7 DAY TIME SWITCH



PANEL BUILDERS CHOICE

APPLICATIONS



- Panel builders
- Indoor/Outdoor lighting
- Security systems
- HVAC equipment

FEATURES

SCHEDULING: 8 ON and OFF pairs of set points for DIN100B. 4 ON and OFF (CH A) and 3 ON and OFF (CH B) pairs of set points for DIN200B. Individual programs on each day of the week. Minimum setting is 1 minute.

MANUAL OVERRIDE: Until the next regular scheduled ON or OFF, automatic operation then resumes.

CLOCK FORMAT: AM/PM.

POWER OUTAGE BACKUP: Battery retains time and schedule.

ORDERING INFO

CATALOG NO.	UPC CODE	DRY CONTACTS	CLOCK INPUT 50/60 Hz	NO. OF CHANNELS	NUMBER OF ON/OFF
DIN100B	82193	SPDT	120VAC	1	8
DIN200B	82192	SPDT	120VAC	2	4 Channel A 3 Channel B

SPECIFICATIONS

INPUT VOLTAGE: 120VAC, 50/60Hz.

TERMINAL RANGE: #12 - #18AWG.

OPERATING TEMPERATURE:
DIN100B: 14°- 131°F (-10°- +55°C).
DIN200B: 14°- 113°F (-10°- +45°C).

POWER CONSUMPTION: 4VA Maximum.



MOUNTING: DIN rail #50022 (35mm) or flat surface using supplied adapter.

CONTACT RATINGS

TYPE	VOLTAGE	RATING	
		NO	NC
Resistive	120VAC	16A	16A
General Purpose	120VAC	8A	8A
Motor (DIN100 only)	120VAC	1/2HP	

WIRING DIAGRAMS

DIN100B

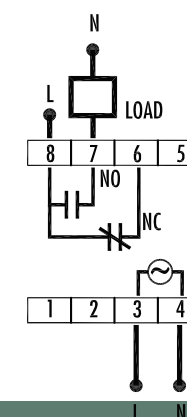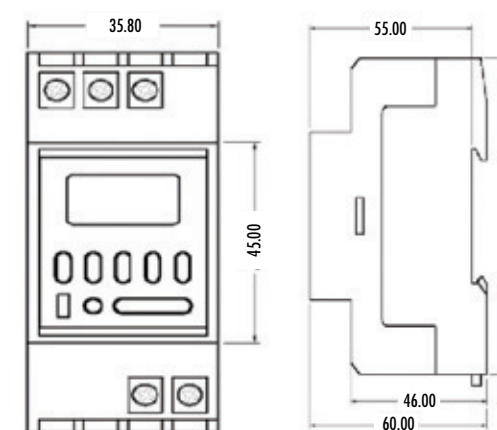

DIN200B

